

STELLAR

Kayaks & Surf Skis




S18S G2

The new redesigned Stellar 18' surf ski (S18S) has increased its speed by increasing the size of the cut-aways and narrowing the bow sections. The S18S rocker has been tweaked along with the trim to optimize the ski for efficient paddling and catching waves. All done without losing any stability and staying within USCA fast sea kayaks regulations. Other changes made for the S18S paddler are DeBrito bailer for dry starts, paddles and rapid water removal, streamlined carbon handles at each end and a large oval hatch in the stern. The comfort, under-stern/over-stern fittings, convenient cockpit handles, water bottle holder, leash attachment and deck bungees still come standard on the Stellar S18S. Making this a boat you need to put in your fleet.

S18S Surf Ski

Length: 17' 11" / 5.48m
Beam: 20.2" / 51.2cm

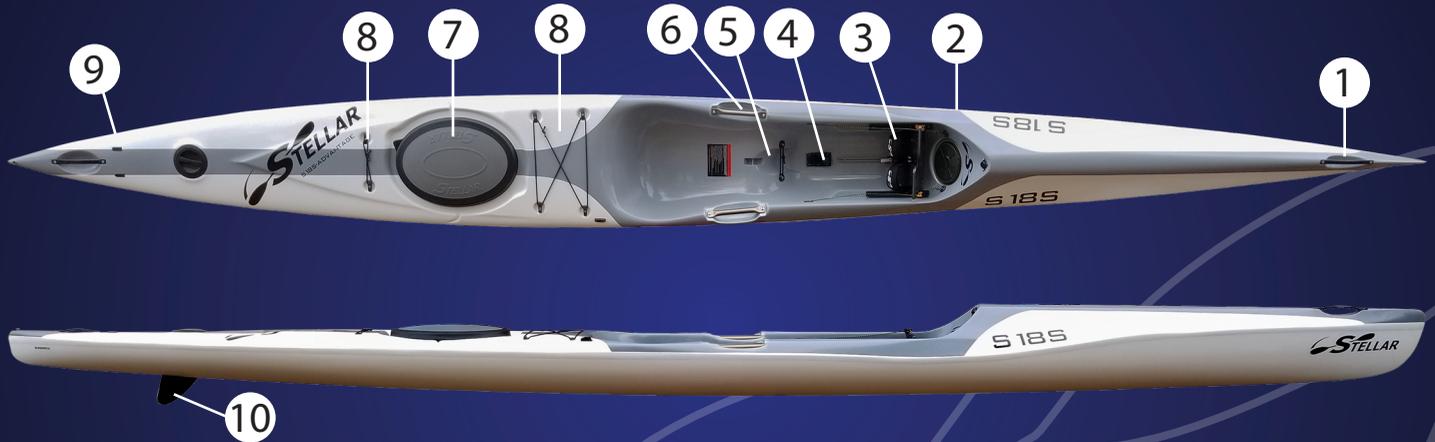

- 1: Streamlined bow and stern composite handles
- 2: Narrow catch for tighter strokes
- 3: 3 point footbrace for powerful leg drive
- 4: Foot closeable Debrito bailer
- 5: Waterbottle holder and leash attachment

- 6: Convenient cockpit handles
- 7: Lg oval stern hatch & round bow hatch
- 8: Stern deck bungees for storage system
- 9: Over-stern rudder fittings & tubing standard
- 10: 3 rudder sizes available

Boat Stats	S18S
Length	17' 11" / 5.48m
Beam	20.2" / 51.2cm
Depth	13.3" / 33.7cm
Paddler	5' - 6' 5" / 1.5m - 1.95m
Capacity	320lbs / 145kg
Cockpit W	NA / NA
Cockpit L	NA / NA

Weights	S18S
Ultra	27.6lbs / 12.5kg
Excel	28.7lbs / 13kg
Multi-Sport	35.3lbs / 16kg
Advantage	35.9lbs / 16.3kg

Grade	Construction
Ultra	Clear finished carbon fiber sandwich construction with Nomex honeycomb core. Epoxy resin laminate heat cured in the mold.
Excel	Gelcoat finished Kevlar and carbon fiber sandwich construction with Nomex honeycomb core. Epoxy resin laminate heat cured in the mold.
Multi-Sport	Durable single-skin carbon/Kevlar epoxy hull w/Clear gelcoat. Epoxy infused fiberglass and Soric core-mat sandwich construction with a gelcoated deck.
Advantage	Gelcoat finished fiberglass infused sandwich construction with Soric core-mat. Epoxy resin laminate heat cured in the mold.